



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> :

B60R 13/00, B32B 31/20, D06N 7/00

A1

(11) International Publication Number:

WO 00/53456

(43) International Publication Date: 14 September 2000 (14.09.00)

(21) International Application Number: PCT/US00/02230

(22) International Filing Date: 31 January 2000 (31.01.00)

(30) Priority Data:

09/266,155

10 March 1999 (10.03.99)


US

(71) Applicant: MAGEE RIETER AUTOMOTIVE SYSTEMS  
[US/US]; 480 West Fifth Street, Bloomsburg, PA 17815  
(US).(72) Inventors: PRICE, Burton, J.; 6 Blue Jay Drive, Bloomsburg,  
PA 17815 (US). WHITAKER, Michael, G.; 10 W. 5th  
Street, Bloomsburg, PA 17815 (US). KNISS, Kurt, Alan;  
16 Country Road, Lewisburg, PA 17837 (US).(74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig,  
P.C., Suite 400, One Penn Center, 1617 John F. Kennedy  
Boulevard, Philadelphia, PA 19103 (US).(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,  
BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,  
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG,  
UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS,  
MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ,  
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: METHOD FOR MANUFACTURING A SOUND INSULATING STRUCTURE AND THE STRUCTURE PRODUCED THEREBY

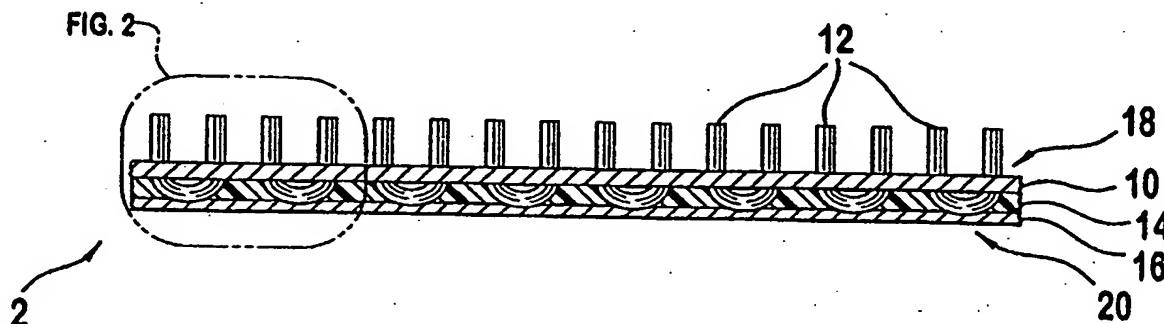

## (57) Abstract

The present invention provides a sound insulating structure cover panel that compliments the sound attenuation material. The method of manufacturing the panel comprises the steps of providing a laminated blank (2) having an interior face which will be observable from the passenger compartment. The side opposite the interior face of the blank has a generally non-permeable polymeric layer (14) adjacent to a primary backing (10) and a secondary backing layer (16) overlying the polymeric layer. In the preferred process, the previously described blank is elevated to a desired temperature and positioned in a closed forming mold (62) such that the perimeter of the blank is retained in a fixed position. The forming mold is closed with a controlled pressure that is sufficient to expand the blank, conform it to the mold and render a panel having a desired permeable.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# **METHOD FOR MANUFACTURING A SOUND INSULATING STRUCTURE AND THE STRUCTURE PRODUCED THEREBY**

## **BACKGROUND OF INVENTION**

### **Field of the Invention**

5       The present invention generally relates to trim panels used to cover the interior surfaces of a vehicle. The invention more particularly relates to panels used to cover the interior surfaces of a passenger vehicle where sound attenuation is desired. The invention most particularly relates to panels which are used in passenger vehicles where appearance and sound attenuation are required. Such  
10   panels are employed as the head liners, wall liners and carpets of a vehicle for the purpose of improving appearance, temperature and sound control while enhancing the passengers' driving pleasure.

### **Description of the Prior Art**

      The use of trim panels and carpet panels to provide passenger comfort are  
15   well known in the art. For example, see U.S. Patents 4,741,945; 4,508,774; and 5,334,338. In addition, the use of these known manufacturing techniques employed by the present invention for producing standard floor covering is also known. See U.S. Patent 5,855,981.

      Early efforts at sound attenuation in vehicles generally relied upon heavy,  
20   dense materials which would resist the entry of exterior noises into the passenger cabin. However, experience with such materials led to concerns about the

transmission of vehicle vibrations and other sounds based upon the heavy insulating materials. Accordingly, the art has recently considered the use of ultralight, multifunctional, sound-insulating materials. For example, see WO 98/18656 and WO 98/18657.

5       More recently, it has been determined that ultralight, multifunctional, sound-insulating materials may not achieve their full benefit when used with exterior cover materials that do not compliment their function. Accordingly, the art desired an exterior or decorative cover material which permitted controlled sound transmission to the interior of the vehicle. It has been theorized that permitting transmission of  
10 some sound into the cabin will result in sound cancellation and a more pleasing passenger environment. As a result of the more pleasing environment, the use of ultralight materials will be greatly enhanced and a reduction in vehicle weight will be recognized without any decrease in cabin comfort.

### SUMMARY OF THE INVENTION

15       The present invention provides a sound insulating structure cover panel that compliments the sound attenuation material. The method of manufacturing the panel comprises the steps of providing a laminated blank having an interior face which will be observable from the passenger compartment. The side opposite the interior face of the blank has a generally non-permeable polymeric layer adjacent  
20 to a primary backing and a secondary backing layer overlying the polymeric layer.

In the preferred process, the previously described blank is elevated to a desired temperature and positioned in a closed forming mold such that the perimeter of the blank is retained in a fixed position. The forming mold is closed with a controlled pressure that is sufficient to expand the blank, conform it to the mold and render a  
5 panel having a desired permeable. Preferably, the post formation panel has a permeability of 500 rayls or less as measured on concentric airflow resistance equipment (C.A.R.E. unit) available from Rieter Automotive North America, Inc. 38555 Hills Tech Drive, Farmington Hills, MI 48331.

### BRIEF DESCRIPTION OF THE DRAWINGS

10 **Figure 1** illustrates a known carpet construction which is suitable for use with the present invention.

**Figure 2** is an enlargement of the construction within the phantom lines of **Figure 1**.

**Figure 3** is an enlargement, similar to **Figure 2**, showing the wicking-in of  
15 the polymeric layer in the construction of the present invention as described in the exemplary embodiment of **Figure 1**.

**Figure 4** illustrates the wicking-in of **Figure 3** within the tufts of yarn.

**Figure 5** illustrates a continuous operation for stretching and molding a panel in accordance with the present invention.

**Figure 6** illustrates a heating table for use with a preferred manufacturing process.

**Figure 7** illustrates a mold assembly in accordance with the invention.

**Figure 8** illustrates a panel in the final molding and cooling stage.

5 **Figure 9** illustrates a molded and cooled panel prior to trimming.

### DETAILED DESCRIPTION OF THE INVENTION

The invention will be described with reference to the drawing figures wherein like numbers indicate like elements throughout. It will be appreciated by those skilled in the art that the drawing figures are not to scale and liberties have  
10 been taken to permit illustration of the invention.

With reference to **Figure 1**, there is shown a material blank **2** wherein a backing layer **10**, of woven or non-woven construction, is used as a support base for a plurality of yarn tufts **12**. Each of the yarn tufts **12** is comprised of a plurality of yarns in either a spun or filament construction. After the insertion of tufts **12** into  
15 the backing **10**, the tufted assembly may be subjected to color and finishing operations before an extrusion coating process which places a polymeric layer **14** on the underside thereof. Finally, a backing layer **16**, generally a porous, non-woven material, is applied to the polymeric layer **14**. This construction will be known to those in the art. As a result of this construction, the resulting laminate  
20 will have a face surface **18** which will be the interior surface and a backing surface

20 which will be the exterior surface. For use in the automotive industry, the laminated material is cut into a blank that is subjected to a molding process for producing a post formation panel of a desired geometry in accordance with the vehicle body geometry. Such a construction is known to those skilled in the art and  
5 does not form any part of the present invention.

Although the above-described construction of the laminate and the panels are known to those skilled in the art, the present invention differs from the known constructions in the selection of materials for polymeric layer 14 and the post formation process parameters used to form the panels. In keeping with the present  
10 invention, the polymeric layer 14 is comprised of a high melt flow polymer which will provide the desired response to the subsequent processing in accordance with the invention. Test materials and panels used to demonstrate the present invention are described below.

The tufted assemblies used for testing were produced by tufting continuous  
15 filament yarns of 1400 denier or 1405 denier BCF nylon yarns into non-woven primary backing substrates of 120 g/m<sup>2</sup>-140g/m<sup>2</sup> polyester fiber. If desired, spun or other yarn constructions may be used. Tufting machine gauges of 1/8 gauge and 1/10 gauge have been evaluated. It will be recognized by those skilled in the art that machine gauge stitches per inch and stitch pile height combine to determine the  
20 overall carpet construction and density. The number of penetrations per square inch is a factor in determining the available porosity and the wicking-in ability of the

construction. The available porosity is an important aspect of the invention because the final product of the preferred embodiment must meet the aesthetic and durability standards set by the vehicle manufacturer. As the construction is altered, the percentage of expansion to achieve the desired post formation product may need to  
5 be modified.

The tufted assemblies of the tests were extrusion coated, using known techniques, with a low density polyethylene coating 14 and laminated with a light weight secondary non-woven polyester substrate. A polyethylene coating 14, of AT 193, available from A. T. Plastic, Inc. of Ontario, Canada, applied between 375-400  
10 g/m<sup>2</sup> has been used successfully with a known 13-17 g/m<sup>2</sup> secondary polyester substrate 16.

The secondary substrate 16 is laminated directly to the polyethylene 14 using a standard nip roll, in accordance with prior practices. The temperature of the polyethylene extruding from the die is approximately 400°F. The nip pressure, for  
15 a laminate of approximately .250 inches, at the rolls was approximately 50 pounds per linear inch and the nip setting was approximately .030 inches. The chill roll temperature was in the range of 55-70°F, and the process line speed varied between 25-40 FPM. At this point, the laminated material was either rolled up or cut into blanks in preparation for the molding operation. Although this laminated material  
20 is still non-permeable, it is correctly prepared for the subsequent process which will render it permeable.



In order to form a finished panel, a specific blank size was cut and heated prior to molding. Through reheating of the carpet laminate, the polymeric layer 14 begins wetting out or wicking-in, see **Figures 3 and 4**. This causes the polymeric layer 14 to flow into the primary backing 10 and the tufts 12. This is the beginning of the transformation from a non-permeable to a permeable laminate. The transformation to the desired permeability was achieved by stretching, molding and curing the heated laminate.

Heating of the material 2 for 25-30 seconds under a heat intensity of 10 to 15 watts per square inch of material has been found to provide a satisfactory temperature elevation with the test material. By heating the back surface 20 to a temperature between 325°-350°F, the polymeric layer 14 can be worked without causing melt flow or a loss of adhesion. The heated blank was molded in a chilled molding tool at approximately 1.5 to 4.0 PSI of mold pressure and 45°F. The approximate cool down time in the molding tool was forty-five (45) seconds. In the test material, these conditions produced a controlled stretch of seven to ten percent (7-10%) of the blank size. Upon removal from the mold, a face panel with the desired air permeability had been produced.

With reference to **Figures 5 through 9**, the manufacturing process, as used to produce test samples and as envisioned for production quantities, will be described. As illustrated in **Figure 5**, the material moves from a supply roll to a

heating table (Figure 6) through a mold (Figures 7 and 8) and is off loaded or further processed as a panel (Figure 9).

In Figures 5 and 6, a supply roll 40 of laminated blank material 2 is secured to a tenter frame 46 which has material retaining means 48 spaced in accordance with the desired blank perimeter. The retainer means 48 may be pins, clips or other holding means to grip the material and establish the length and width of the blank. They preferably are adjustable or removable to provide a cutting gap 50 where a transverse cutter 51 can cut the blank from the supply roll 40. The blank passes over the heating table 52 beneath a plurality of heating elements 54 which are selected in accordance with the construction of the laminated blank material 2 so as to achieve the desired temperature. It is expected that the elements at the entrance 56 will be selected to rapidly elevate the temperature while the elements at the exit 58 will be selected to achieve equalization at a desired temperature.

In Figure 7, the heated panel 60 is presented to the refrigerated mold 62 which has a movable, pressure applying half 64 and a stationary refrigerated half 66. While being held by the retainers 48, the blank 60 is aligned over the mold as it is closed at the desired pressure to stretch the generally planar blank 60 over the contour of the mold. It will be recognized by those skilled in the art that the mold 62 is configured, in both halves 64 and 66, to the geometry of the vehicles floor board. When the mold 62 is finally closed, as illustrated in Figure 8, the blank 60 might be repositioned in the mold 62, however, the original perimeter of the blank

will remain substantially unchanged. After the molded panel 70 is released from the mold, **Figure 9**, it may continue to a subsequent processing operation as described hereinafter, or the perimeter may be trimmed to provide a finished and cut to size molded panel.

5           The test samples produced for this invention were made with the use of piece goods that were presented to the heating table and molded through a hand operation. In this operation, the heated blank was manually placed over a stationary tenter frame adjacent to the mold and the mold was manually emptied when the stretching and molding operation had been completed.

10           Permeability of the test samples was established by using a C.A.R.E. unit. On average, three readings were taken in four locations on each sample to establish that the panel had achieved the desired permeability. Generally, for automotive purposes, it is preferred to take the test reading in the flat of the foot wells or the base of the panel. In any event, it is preferred that the reading be taken in an area  
15   more representative of the mold extension. Thus, a flat portion directly over the tunnel may not be fairly representative. In addition to the above, the use of a well base also provides the practical advantage of being accessible and supportable. It is important to support the sample on a firm but open surface, such as a mesh table, that will not restrict air flow, so the test equipment can be applied firmly.

20           As noted previously, this invention was motivated by the desire to enhance the use of ultralight material as described in W098/18656 and 2098/18657. The

description of that material is incorporated herein as if fully set forth. In keeping with the effort to achieve the maximum benefits of this combination, the assembly of the panel 70 to the ultralight material will be described. Since the combined components must maintain the permeability of the entire sound insulation assembly within a specified range, they must be carefully adhered together. One acceptable adhesive is available from National Starch as item 34-3378 with a melt viscosity of 1500-2125 centipoise at an application temperature of approximately 400°F. An application of hot melt adhesive in the range of 7-9 gm/Ft.<sup>2</sup> has found to be successful in adhering the components while maintaining the desired permeability.

10 The adhesive which may be applied to either the carpet or the insulator, preferably, is in a randomized web. This randomized application assures adhesive bonding in all areas without restricting the permeability. The two components should be aligned for accuracy before bonding to prevent multiple positioning attempts which diminish the adhesion and disturb the permeability. The assembly  
15 press used to assure physical bonding of the components has preset stops which limit the forces on the components and prevents compression of the sound insulator beyond that needed for adhesion and maintains the assembly's permeability characteristics. Based on the test samples, the assembled components should be compressed with a force that will not compress the ultralight material beyond its  
20 specified finished part thickness by more than 2mm. This avoids a compression from which the ultralight material may not rebound.

It will be recognized by those skilled in the art that the automotive industry has specifications and test methods for product performance and durability that must be met by the product in the field. The panels produced in accordance with the present invention have met these product and test specifications.

## CLAIMS

I claim:

1. A process for manufacturing a sound insulating structure comprising the steps of:

providing a textile material having interior and exterior sides, a generally non-permeable polymeric layer overlying the exterior side and a backing layer

5 overlying the polymeric layer to form a laminated product;

presenting the laminated product to a forming mold such that the perimeter of the product is retained in a fixed position relative to the mold; and

closing the forming mold under a controlled pressure, heat and time cycle sufficient for expanding the panel to conform it to the mold and to render the

10 laminated product permeable.

2. A laminar assembly of a type having a textile material with interior and exterior surfaces, a non-permeable polymeric layer, overlying the exterior surface, and a backing layer, overlying the non-permeable layer, that are laminated together with the laminated product postformed in a molding apparatus, the

5 improvement characterized by:

the polymeric layer having a post formation permeability of 500 rayls or less as measured by concentric airflow resistance equipment.

3. A vehicle sound insulating structure of a type having a carpet assembly with face and interior surfaces and a polymeric layer overlying the interior surface, and sound insulating material overlying the polymeric layer, the improvement characterized by:

5 the carpet assembly having a permeability of no more than 500 rayls as measured by concentric airflow resistance equipment.

4. A process for manufacturing a sound insulating structure comprising the steps of:

providing a textile panel having interior and exterior faces, a generally non-permeable polymeric layer overlying the exterior face and a backing layer overlying  
5 the polymeric layer;

preheating the panel to a controlled temperature;

positioning the preheated panel in a forming mold such that the perimeter of the panel is retained in a fixed position relative to the mold; and

closing the forming mold with controlled pressure sufficient for expanding  
10 the panel to conform it to the mold and to produce a desired permeability through the panel.

5. An assembly of a type having a panel with interior and exterior surfaces, a polymeric layer, overlying the exterior surface, and a backing layer,

overlying the polymeric layer, laminated together with the laminate post formed in a molding apparatus, the improvement characterized by:

5. a post formation panel having a permeability of 500 rayls or less as measured by concentric airflow resistance equipment.

6. A vehicle carpet assembly with face and interior surfaces and sound insulating material adjacent the interior surface carpet assembly characterized by:

the carpet assembly having a permeability of 500 rayls or less as measured by concentric airflow resistance equipment.



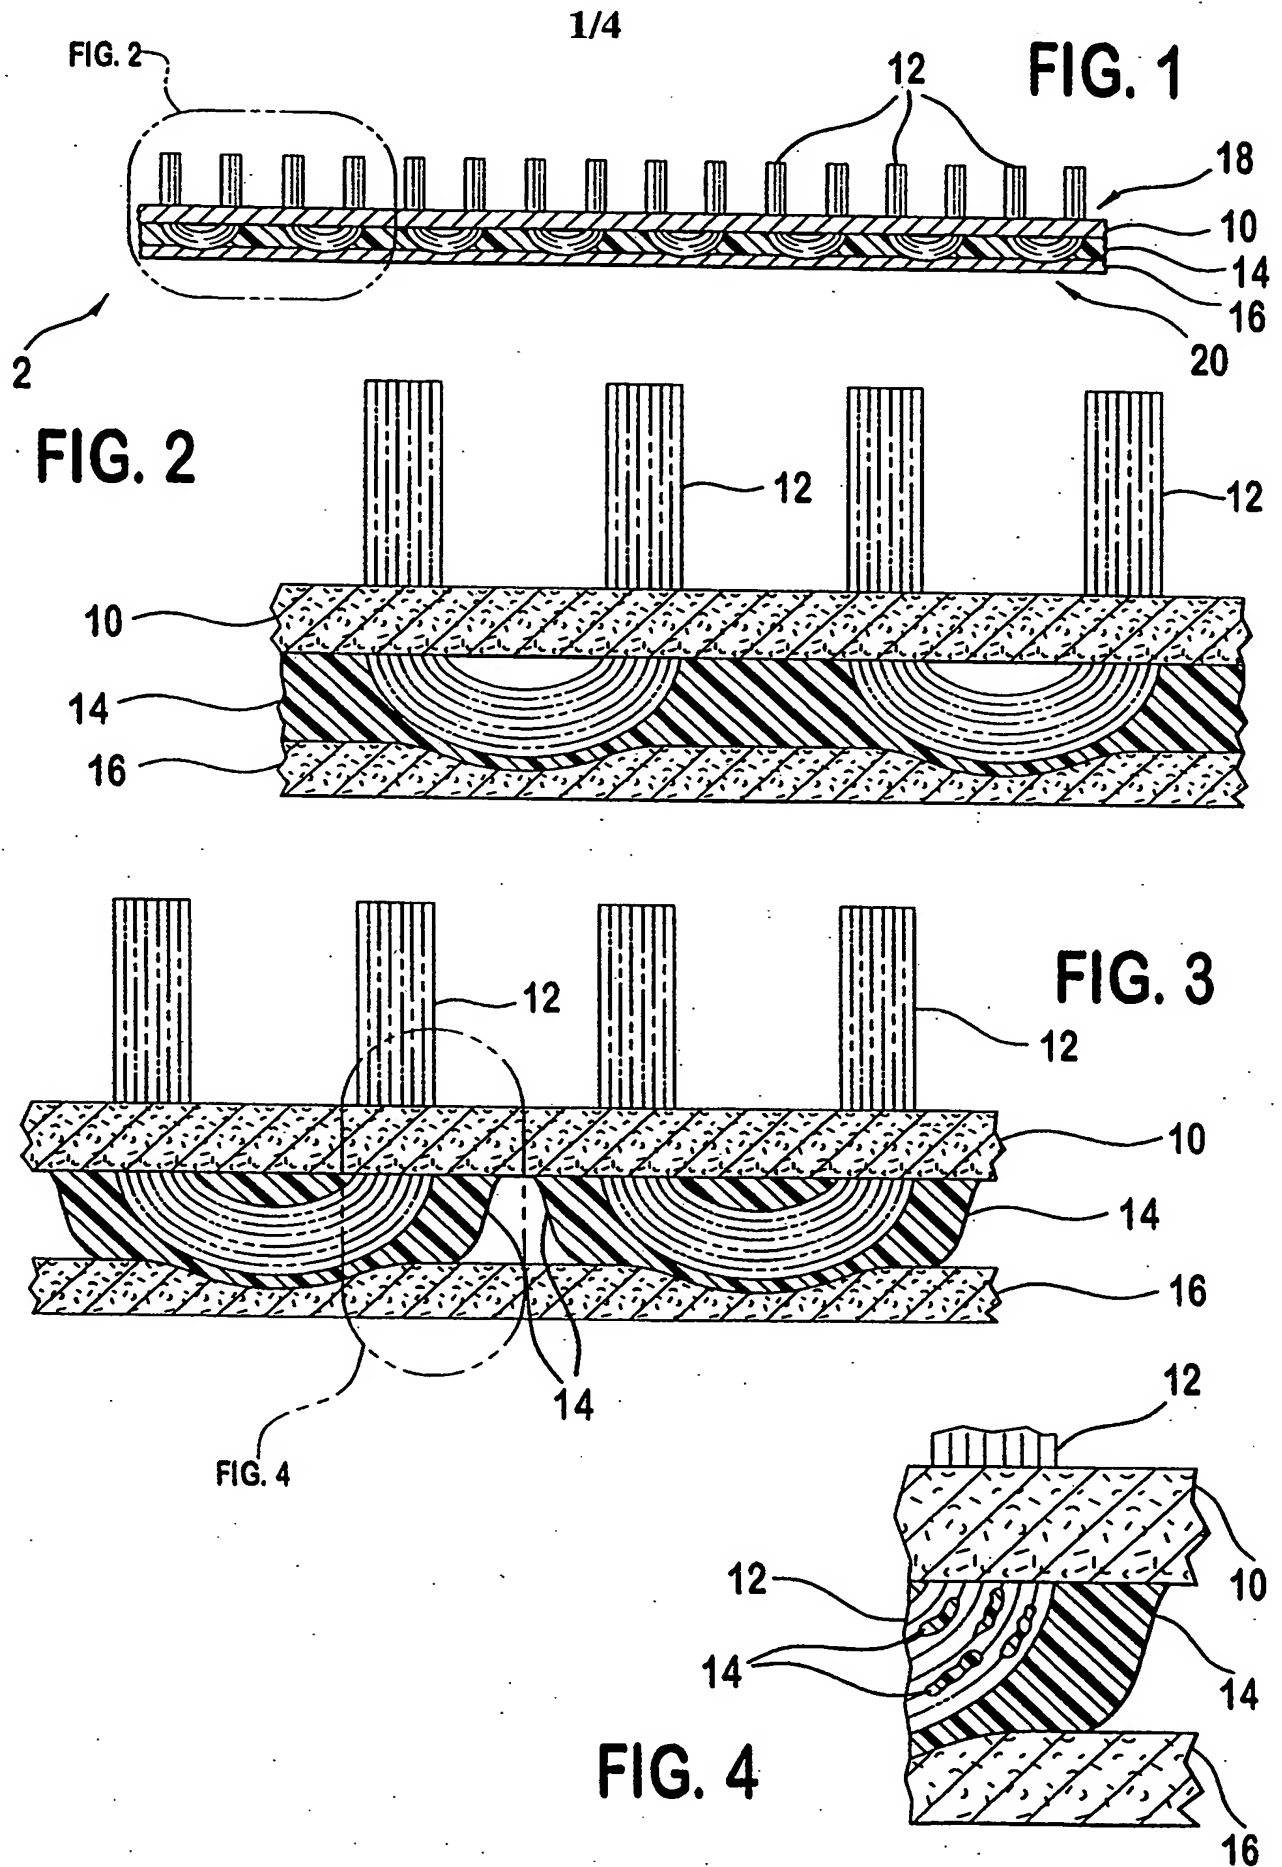


FIG. 5

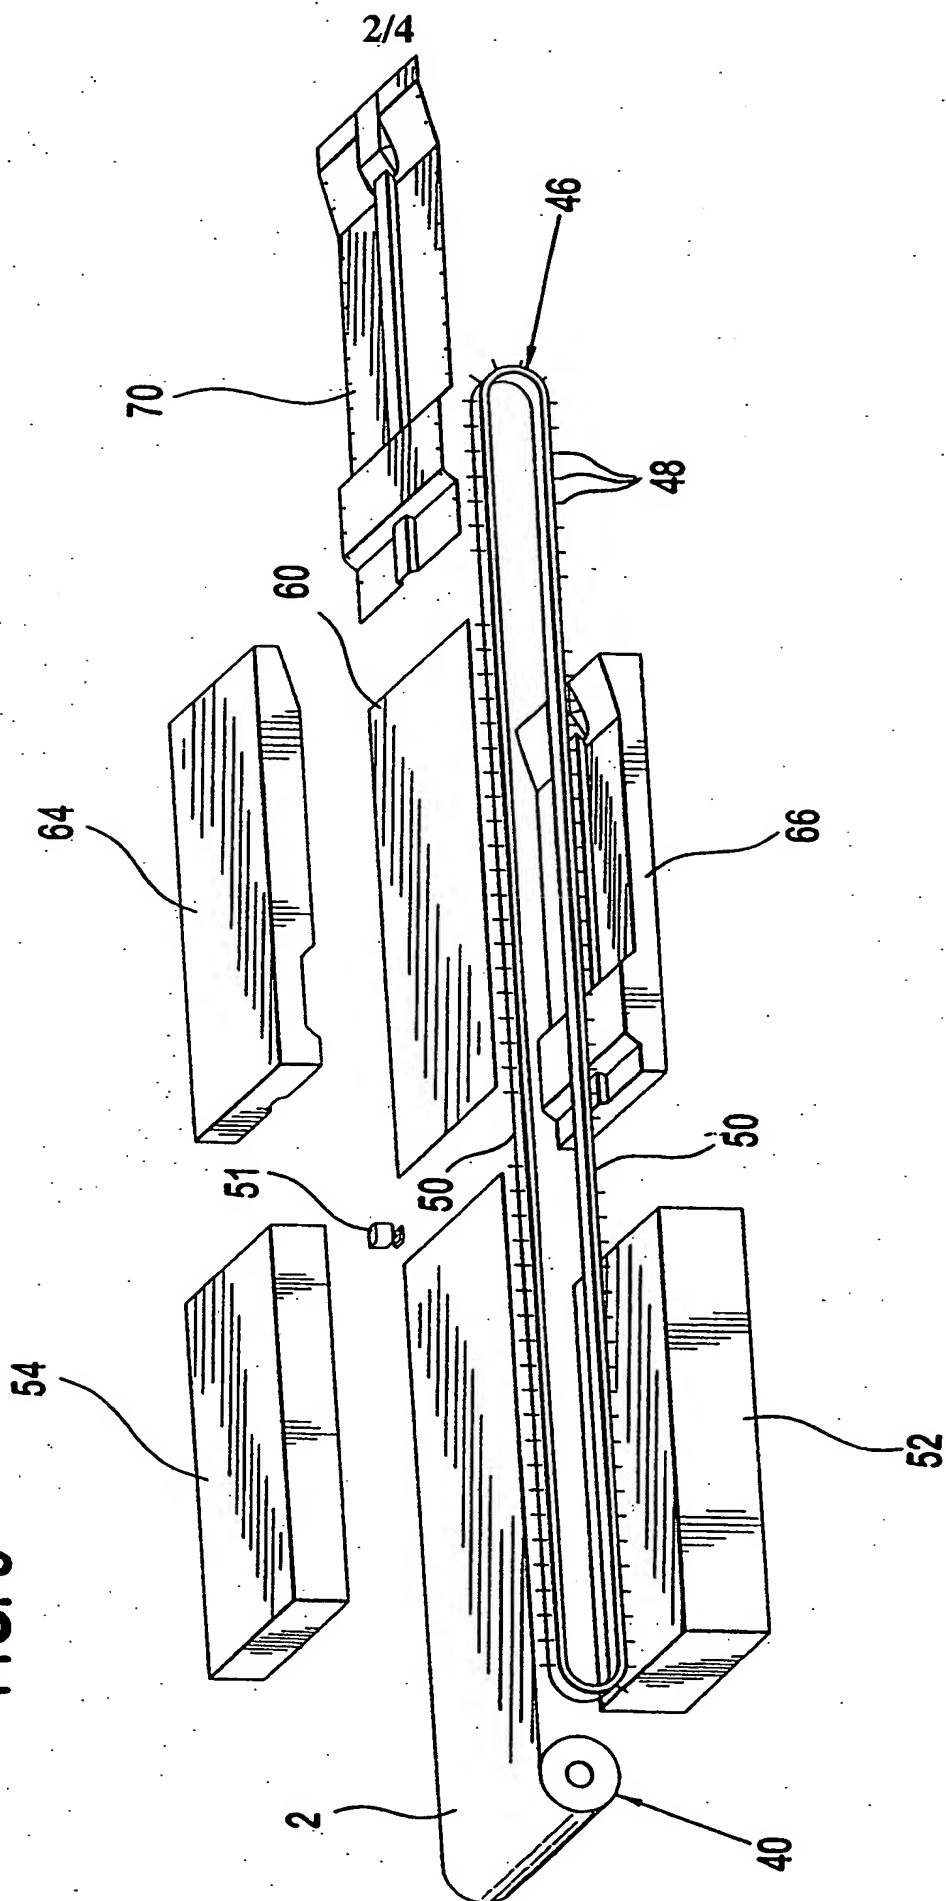


FIG. 6


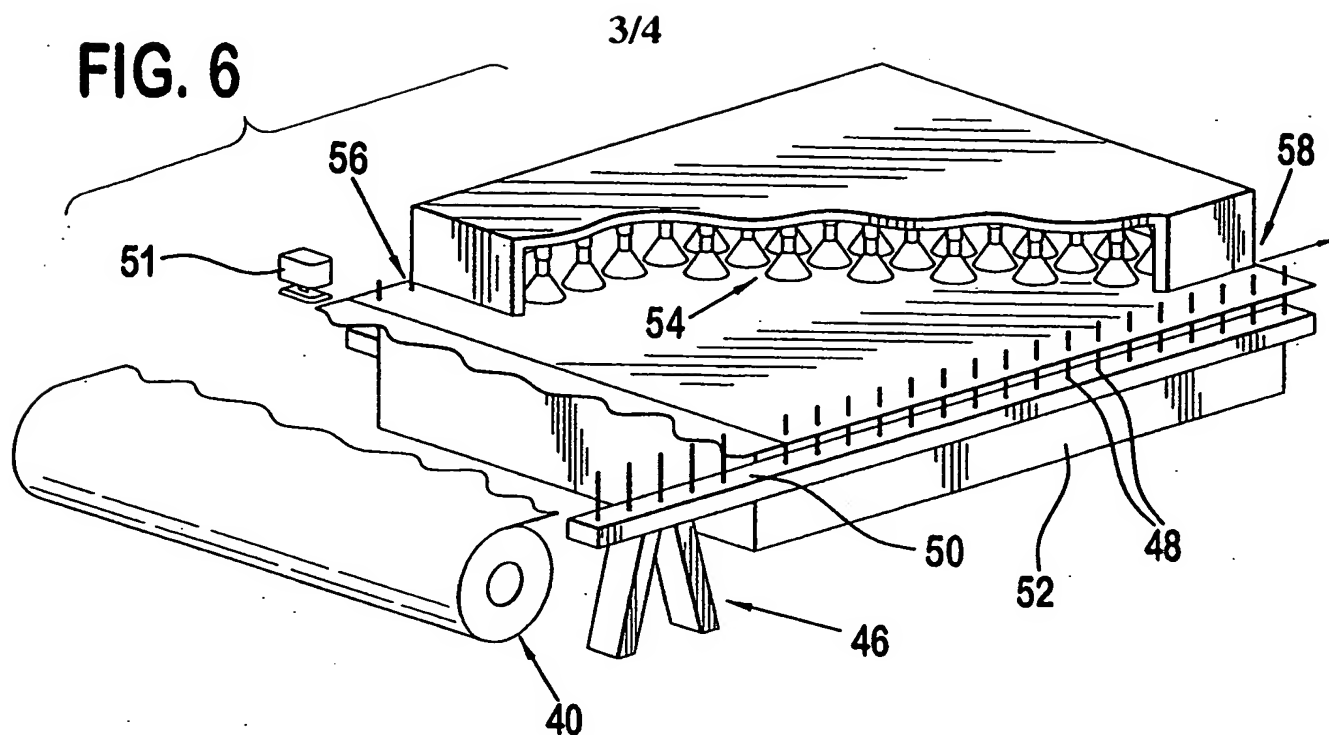


FIG. 7

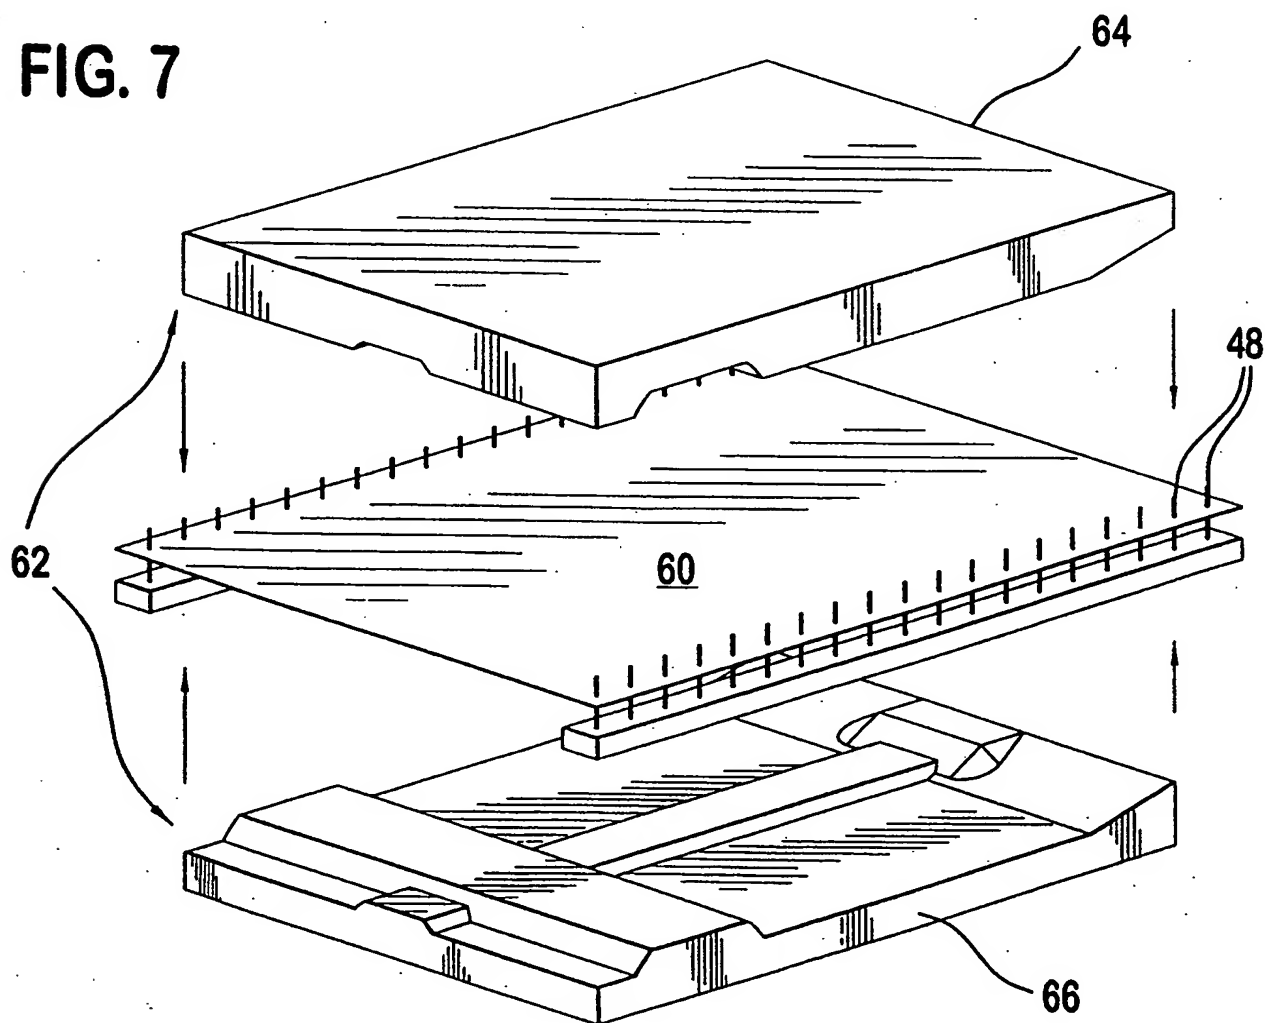

4/4

FIG. 8


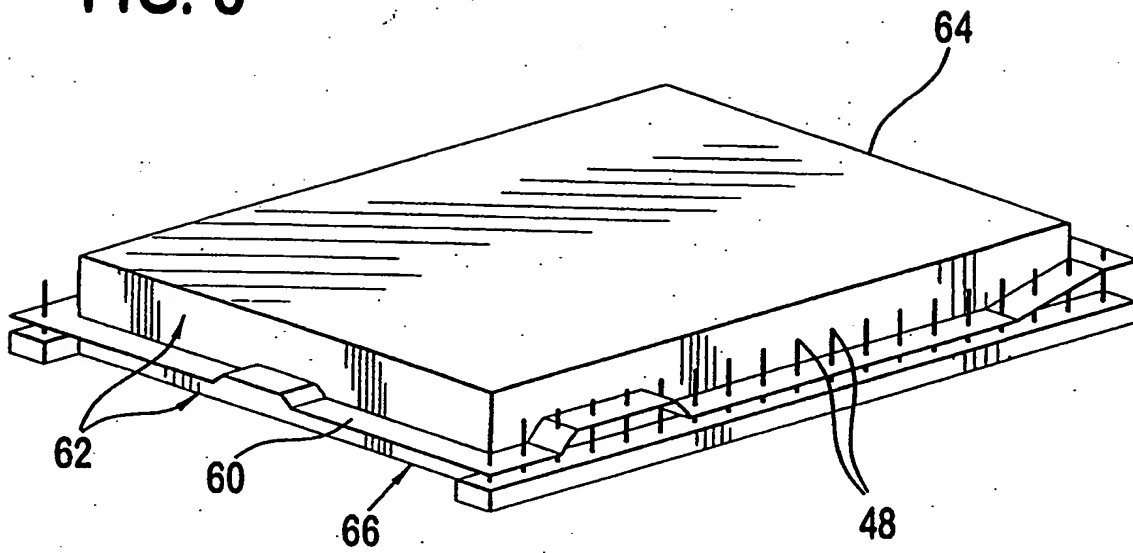


FIG. 9

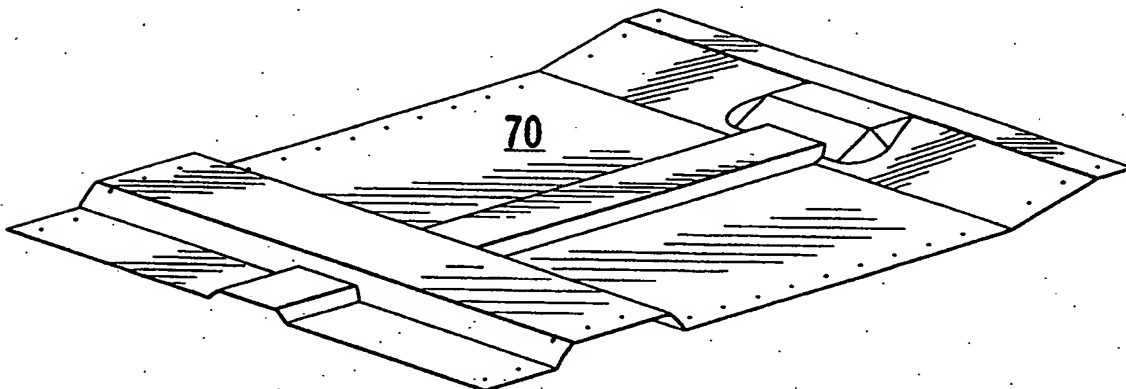

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/02230

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60R13/00 B32B31/20 D06N7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C B60R G10K E04F B32B D06N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 584 232 A (FRANK WERNER ET AL) 22 April 1986 (1986-04-22)	5,6
A	column 1, line 1 - column 2, line 21 column 2, line 63 - column 3, line 10; figure 5	1-4
A	US 5 855 981 A (WEINLE PAUL L ET AL) 5 January 1999 (1999-01-05) cited in the application column 2, line 44 - line 54 column 4, line 6 - line 39; figure 2	1-6
A	US 5 334 338 A (KITTEL CHRISTOPH ET AL) 2 August 1994 (1994-08-02) cited in the application column 1, line 40 - column 2, line 42; figure 1	1-6



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 May 2000

Date of mailing of the international search report

23/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Fageot, P

# INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/US 00/02230

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 715 473 A (TSCHUDIN-MAHRER ROLF) 29 December 1987 (1987-12-29) column 1, line 24 -column 2, line 15 column 3, line 14 - line 34; figures 2-4 -----	1-6
A	US 4 579 764 A (HICKS JACQUELYN S ET AL) 1 April 1986 (1986-04-01) column 1, line 15 - line 34 column 1, line 63 -column 2, line 68; figures 3,4 -----	1-6
A	US 4 199 634 A (GRAHAM EVERETT S ET AL) 22 April 1980 (1980-04-22) column 1, line 38 -column 2, line 30 column 3, line 20 - line 28; figures 1,3,4 -----	1-6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/02230

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4584232 A	22-04-1986	DE 3301682 A	26-07-1984
		AT 26190 T	15-04-1987
		AU 559367 B	05-03-1987
		AU 2437584 A	15-08-1984
		DE 3462833 D	30-04-1987
		WO 8402998 A	02-08-1984
		EP 0131616 A	23-01-1985
US 5855981 A	05-01-1999	EP 0867557 A	30-09-1998
		EP 0976522 A	02-02-2000
		US 5728741 A	17-03-1998
		US 5914353 A	22-06-1999
US 5334338 A	02-08-1994	DE 3809980 A	05-10-1989
		AT 148394 T	15-02-1997
		EP 0334178 A	27-09-1989
		ES 2101675 T	16-07-1997
		JP 1281928 A	13-11-1989
		JP 2821899 B	05-11-1998
US 4715473 A	29-12-1987	DE 3445656 A	26-06-1986
		AT 56392 T	15-09-1990
		DE 3579677 D	18-10-1990
		EP 0185839 A	02-07-1986
		JP 61145598 A	03-07-1986
US 4579764 A	01-04-1986	US 4529639 A	16-07-1985
		AT 52555 T	15-05-1990
		CA 1240603 A	16-08-1988
		DE 3671059 D	13-06-1990
		EP 0210102 A	28-01-1987
		JP 62020746 A	29-01-1987
		CA 1223911 A	07-07-1987
		EP 0169627 A	29-01-1986
		JP 61063784 A	01-04-1986
US 4199634 A	22-04-1980	CA 1116504 A	19-01-1982
		DE 2809347 A	25-01-1979
		FR 2382737 A	29-09-1978
		GB 1601677 A	04-11-1981
		IT 1109748 B	23-12-1985
		SE 431309 B	30-01-1984
		SE 7802191 A	05-09-1978